

Declaration of Performance 4





The Window Glass Company (Bristol) Ltd., 11 Emery Road, Brislington, Bristol BS4 5PF

13

EN 14351-1: 2006 +A1:2010

System: Windowglass 200 Black Glazing Bead List: Double (237In-Wall)  
Doors to be used in residential and non-residential buildings (Non escape routes)

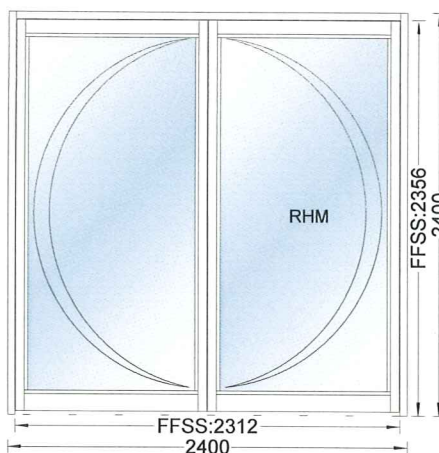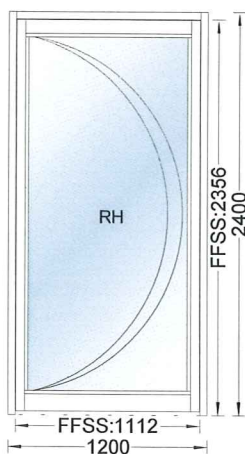

Construction Project: CE marking U values

Position: Single & Double door, pivoted & rebated

Framing members: 227-203-229-230-232-237-242

Glazing: Maximum 1.1 W/m<sup>2</sup>K U value Double Glazed Unit with standard aluminium spacer OR  
1.4 W/m<sup>2</sup>K U value Double Glazed Unit with warm edge spacer

Properties	Class
Resistance to Wind Load - Test Pressure:	NPD
Resistance to Wind Load - Frame Deflection:	NPD
Water Tightness - Unprotected (A):	NPD
Water Tightness - Protected (B):	NPD
Dangerous Substances:	None
Impact Resistance:	NPD
Load Bearing Capacity of Safety Devices:	Threshold Value
Fixed Frame Sight Height:	2356 mm
Ability to Release:	NPD
Acoustic Performance $R_w$ (C; $C_{tr}$ ):	NPD
Thermal Transmission Coefficient:	3.40 W/(m <sup>2</sup> K)
Air Permeability:	NPD


**Declaration:**

The performance of the product identified above is in conformity with the declared performance in the table above. This declaration of performance is issued under the sole responsibility of The Window Glass Company (Bristol) Limited.

Signed for and on behalf of the manufacturer by:

Peter Whitmarsh

M.D.



Bristol 28.6.13