

Declaration of Performance 6ER




The Window Glass Company (Bristol) Ltd., 11 Emery Road, Brislington, Bristol BS4 5PF

14

EN 14351-1: 2006 +A1:2010

System: Windowglass 800 Glazing Bead List: 835

Doors to be used in residential and non-residential buildings (Escape routes)

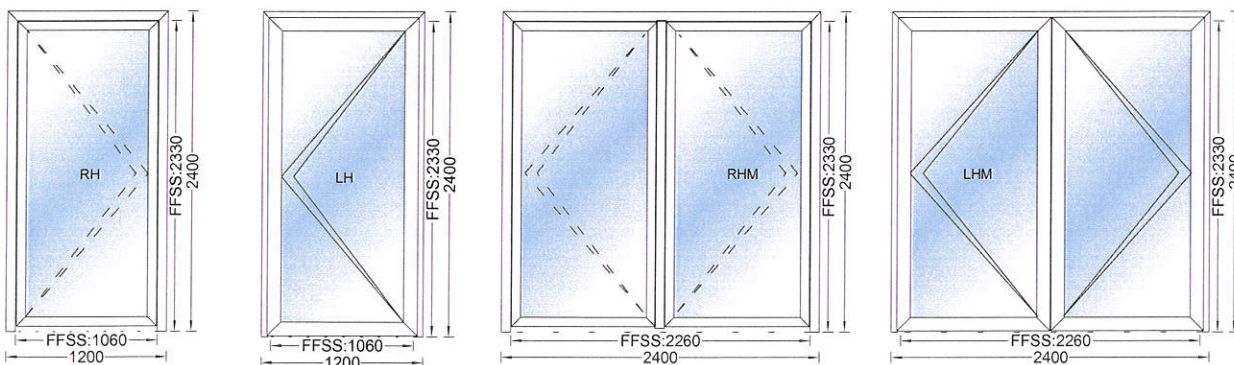

Construction Project: CE marking U values

Position: Single & Double doors Open In & Open Out

Framing members: 806-839-851-852-855-856-835

Glazing: Maximum 1.1 W/m²K U value Double Glazed Unit with standard aluminium spacer OR 1.4 W/m²K U value Double Glazed Unit with warm edge spacer

| Properties | Class |
|--|---------------------------|
| Resistance to Wind Load - Test Pressure: | NPD |
| Resistance to Wind Load - Frame Deflection: | NPD |
| Water Tightness - Unprotected (A): | NPD |
| Water Tightness - Protected (B): | NPD |
| Dangerous Substances: | None |
| Impact Resistance: | NPD |
| Load Bearing Capacity of Safety Devices: | Threshold Value |
| Fixed Frame Sight Height: | 2330 mm |
| Ability to Release: | Threshold Value |
| Acoustic Performance R _w (C; C _{tr}): | NPD |
| Thermal Transmission Coefficient: | 2.00 W/(m ² K) |
| Air Permeability: | NPD |

Declaration:

The performance of the product identified above is in conformity with the declared performance in the table above. This declaration of performance is issued under the sole responsibility of The Window Glass Company (Bristol) Limited.

Signed for and on behalf of the manufacturer by:

Peter Whitmarsh

M.D.