

Declaration of Performance 3




The Window Glass Company (Bristol) Ltd., 11 Emery Road, Brislington, Bristol BS4 5PF

13

EN 13830: 2003

System: Windowglass 500

Curtain wall as mullion/transom construction to be used in residential and non-residential buildings

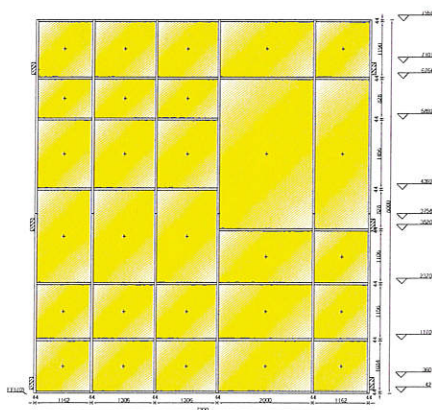

Construction Project: CE marking U values

Position: CW

BoQ-Position: CWCT test rig sizes

Glazing: Maximum 1.1 W/m²K U value Double Glazed Unit with standard aluminium spacer OR 1.4 W/m²K U value Double Glazed Unit with warm edge spacer

Properties	Class
Reaction to Fire:	NPD
Impact Resistance Inside:	I5
Impact Resistance Outside:	E5
Fire Resistance:	NPD
Fire Spread:	NPD
Resistance to Horizontal Loads:	NPD
Watertightness:	R7
Air Permeability:	A4
Resistance to Permanent Weight:	NPD
Thermal Transmittance:	1.70 W/(m ² K)
Resistance to Wind Load:	2400 Pascals (serviceability)
Acoustic Performance:	NPD

Declaration:

The performance of the product identified above is in conformity with the declared performance in the table above. This declaration of performance is issued under the sole responsibility of The Window Glass Company (Bristol) Limited.

Signed for and on behalf of the manufacturer by:

Peter Whitmarsh

M.D.

Bristol 28.6.13